



3D|CORE™
all around composites

3D|CORE™ TECHNOLOGY



FABRIC

FABRIC

3D|CORE™ FOAM CORE

RESIN

3D|CORE™
all around composites

3D|CORE™ TECHNOLOGY


THE LIGHTWEIGHT SOLUTION WITH A SYSTEM!


3D|CORE™ is a patented honeycomb structure that is inserted into a closed-cell PET or XPS foam core. The honeycombs, which are connected to each other via small foam bridges, run through the entire foam core and enable a high flexibility of the core. Between the individual honeycomb foam bodies are cavities that are filled with a matrix of synthetic resin and support the filling process as an integrated flow aid.

ONCE THE MATRIX HAS CURED:

- The foam core retains its shape and develops excellent technical properties
- The cover layers on both sides of the foam core are connected to each other via the honeycomb structure
- The detachment of the cover layers from the core is prevented (delamination)
- The complete failure of the component is excluded


RECYCLED
3D|CORE™ PET GR
FOAM CORE

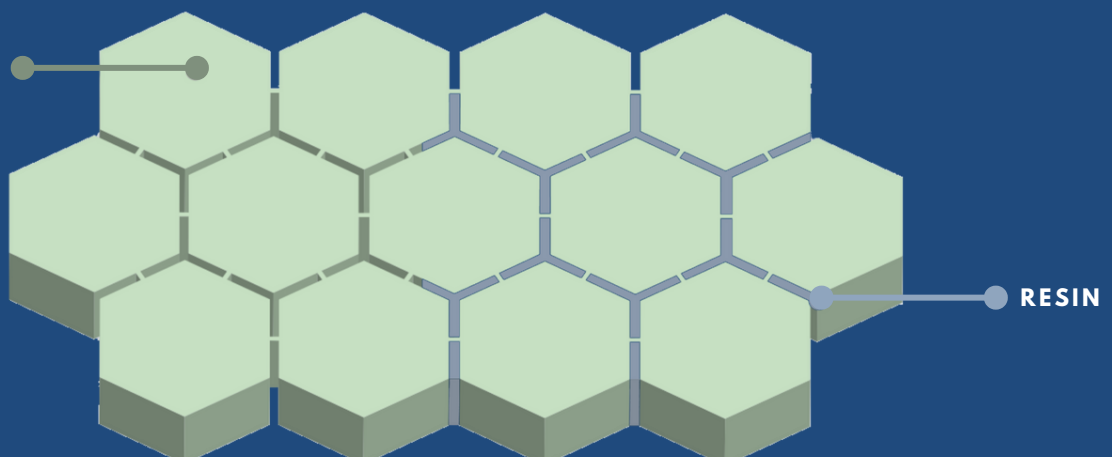

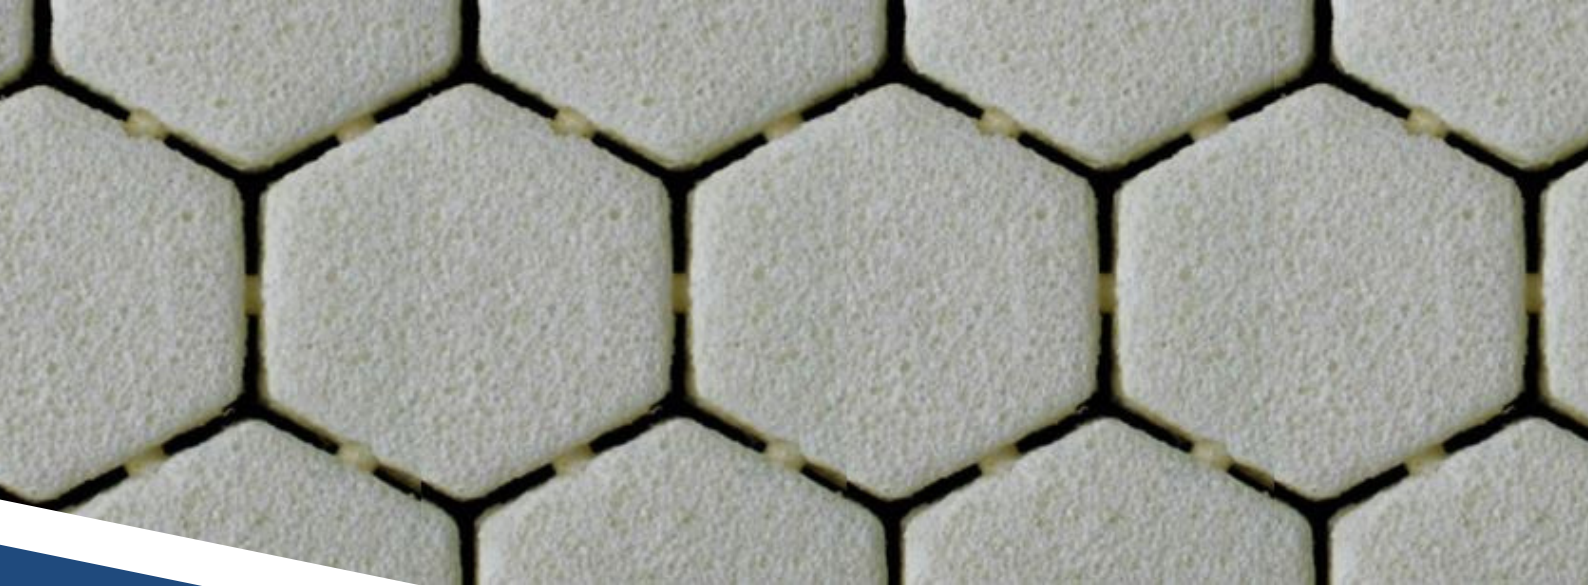


YOUR BENEFITS 3D|CORE™ FOAM CORE

THE 3D|CORE™ STRUCTURE GIVES TECHNICAL RIGID FOAM CORES MAXIMUM FLEXIBILITY:

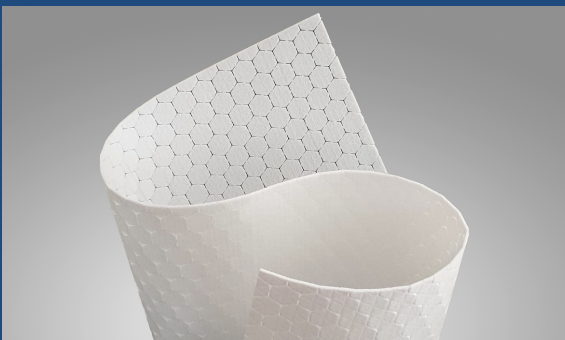

- Three-dimensional formability for the production of convex and concave components
- Easy handling without pressure and heat
- No additional processing steps required (no intermediate vacuum as 3D|CORE™ foam cores adhere to the mould)
- Increased drapability (adaptation to complex shapes and contours)


THE 3D|CORE™ STRUCTURE ACTS AS AN INTEGRATED FILLING AND VENTING SYSTEM:

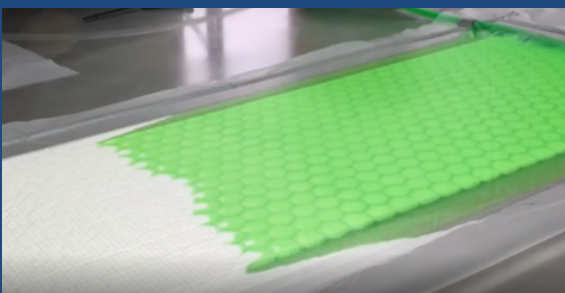

- The 3D|CORE™ honeycomb structure acts as an integrated flow aid and supports the filling process with a liquid matrix (no additional flow aid is required)
- Increased process speed and reliability (optimal resin filling and wetting of the surface layers guarantee a homogeneously filled component)


YOUR BENEFITS FILLED 3D|CORE™ STRUCTURE

THE RESIN STRUCTURE AROUND THE INDIVIDUAL HONEYCOMB FOAM BODIES HOLDS THE LAMINATE TOGETHER:

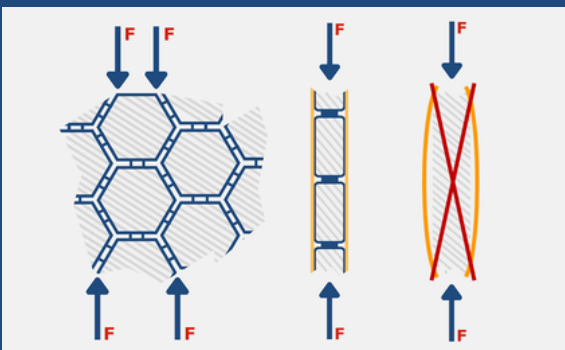


- Long-term resistance even under permanent load (delamination of the surface layers and component failure are prevented)
- High damage tolerance of the final component

ONCE THE RESIN HAS CURED, THE COMPONENT RETAINS ITS SHAPE:

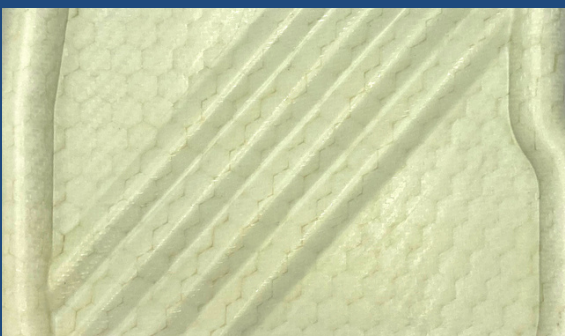


- The honeycomb foam bodies follow the shaping contour and do not stick out
- The component remains dimensionally stable after being processed

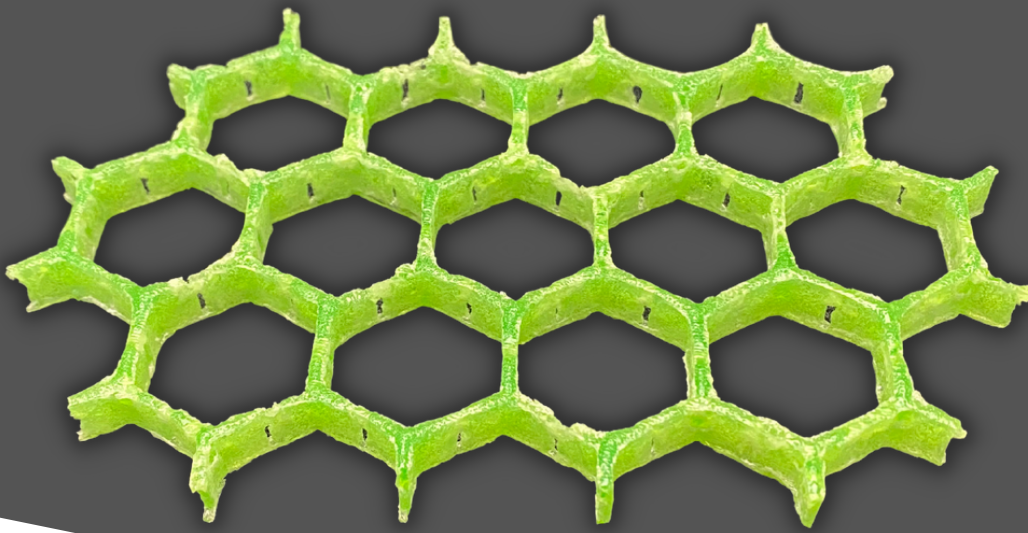



3D|CORE™
all around composites

YOUR BENEFITS FILLED 3D|CORE™ STRUCTURE

THE RESIN AROUND THE 3D|CORE™ STRUCTURE ACTS AS A DOUBLE-T-BEAM AND ENABLES EXCELLENT MECHANICAL PROPERTIES:

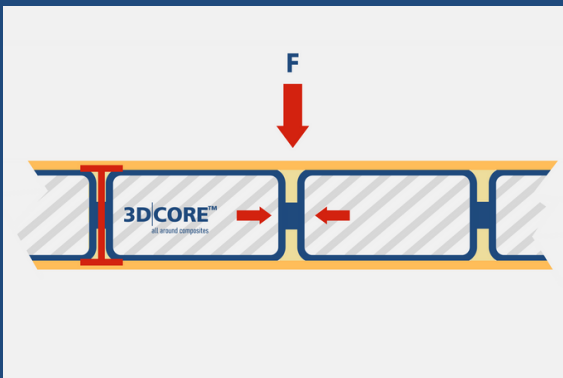

- Improved shear and compression properties compared to standard foam cores (800% higher compression modulus, 300% higher shear modulus)
- Increased strength and stiffness compared to standard foam cores (500% higher flexural strength)
- Optimal performance to weight ratio
- Optimal absorption and transmission of forces (in-plane compression load significantly better than regular systems)
- The reinforced 3D|CORE™ high-performance foam cores replace monolithic structures and other core materials in moulds and final components

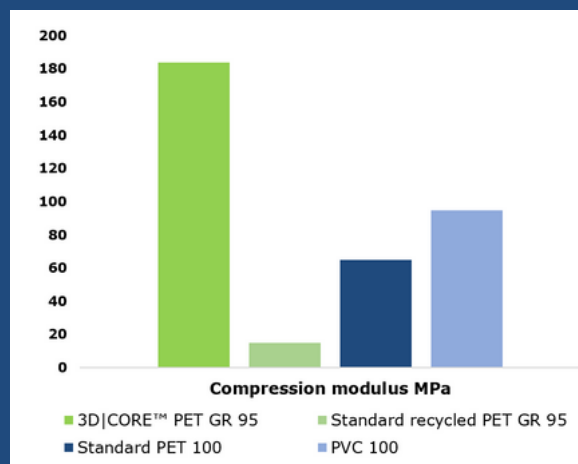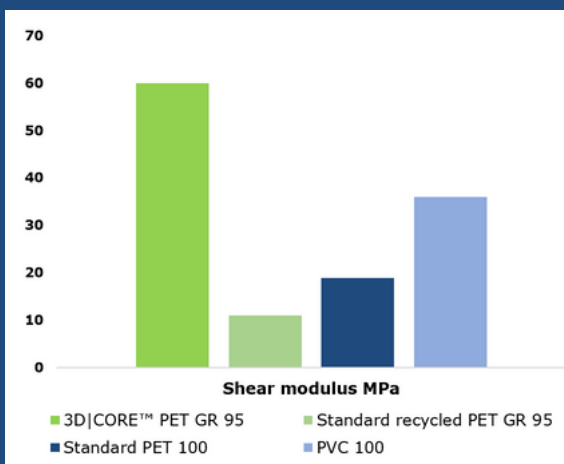



Component weight



Costs



Material usage



Sustainability



Quality




Efficiency

3D|CORE™
all around composites

YOUR BENEFITS 3D|CORE™ SYSTEM

3D|CORE™ ENABLES SIGNIFICANT SAVINGS COMPARED TO STANDARD FOAM CORES AND MONOLITHIC STRUCTURES:

- Material savings: significantly less consumables (no flow aid, peel ply, fleece, perforated film and spray adhesive), less resin consumption (no additional resin for consumables), less fibres
- Weight saving: the closed-cell 3D|CORE™ foam and its honeycomb structure ensure calculable resin and fibre consumption (no additional resin and fibres without technical benefit)
- Cost saving: resulting from less weight and material and the immense time savings in processing

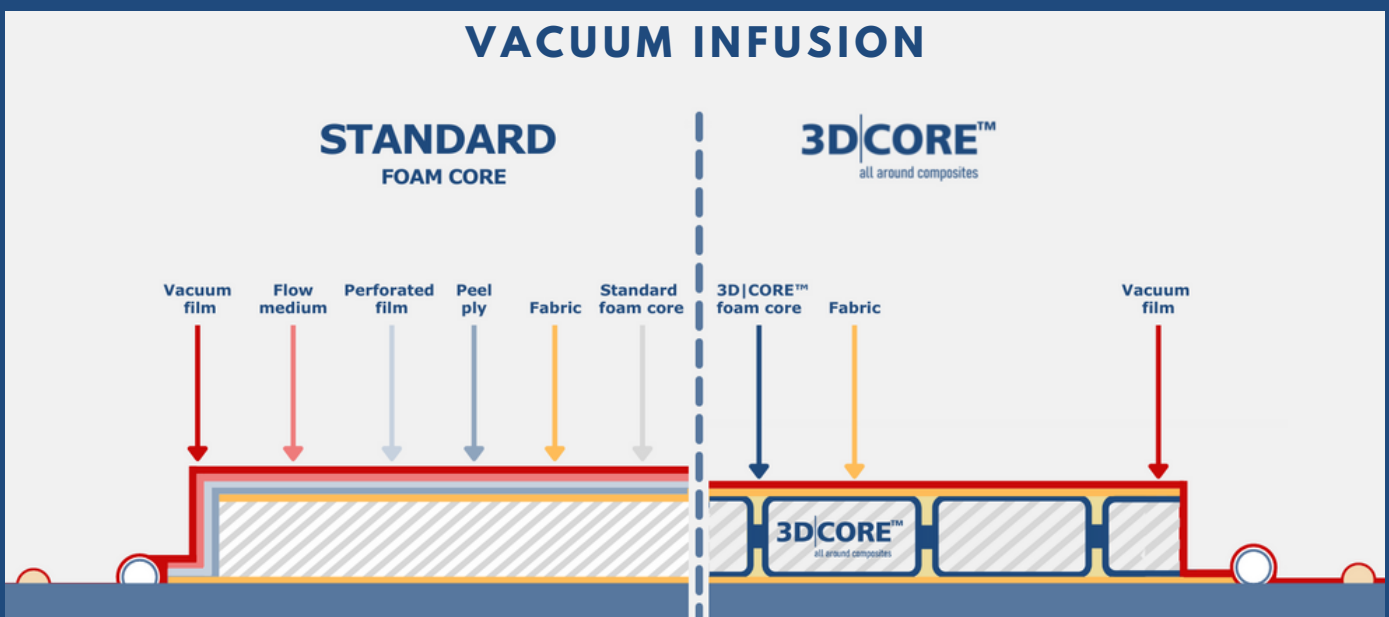




3D|CORE™
all around composites

YOUR BENEFITS 3D|CORE™ SYSTEM

3D|CORE™ SUPPORTS YOU IN ACHIEVING YOUR CO₂ TARGETS:

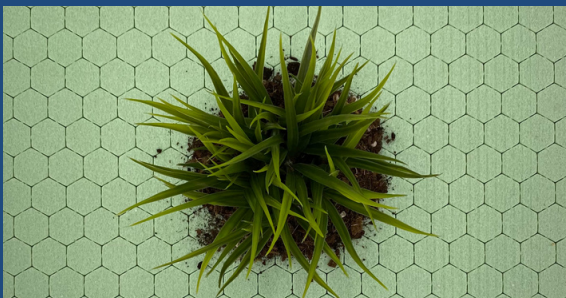


- Sustainable manufacturing process (savings of consumables)
- Recycled and recyclable core materials
- Minimization of material consumption (no extra weight without technical benefit)

DID YOU KNOW?


300 m² of our 3D|CORE™ PET GR in 20 mm thickness save 969 kg CO₂.

That is equivalent to one passenger flying from Frankfurt to New York!



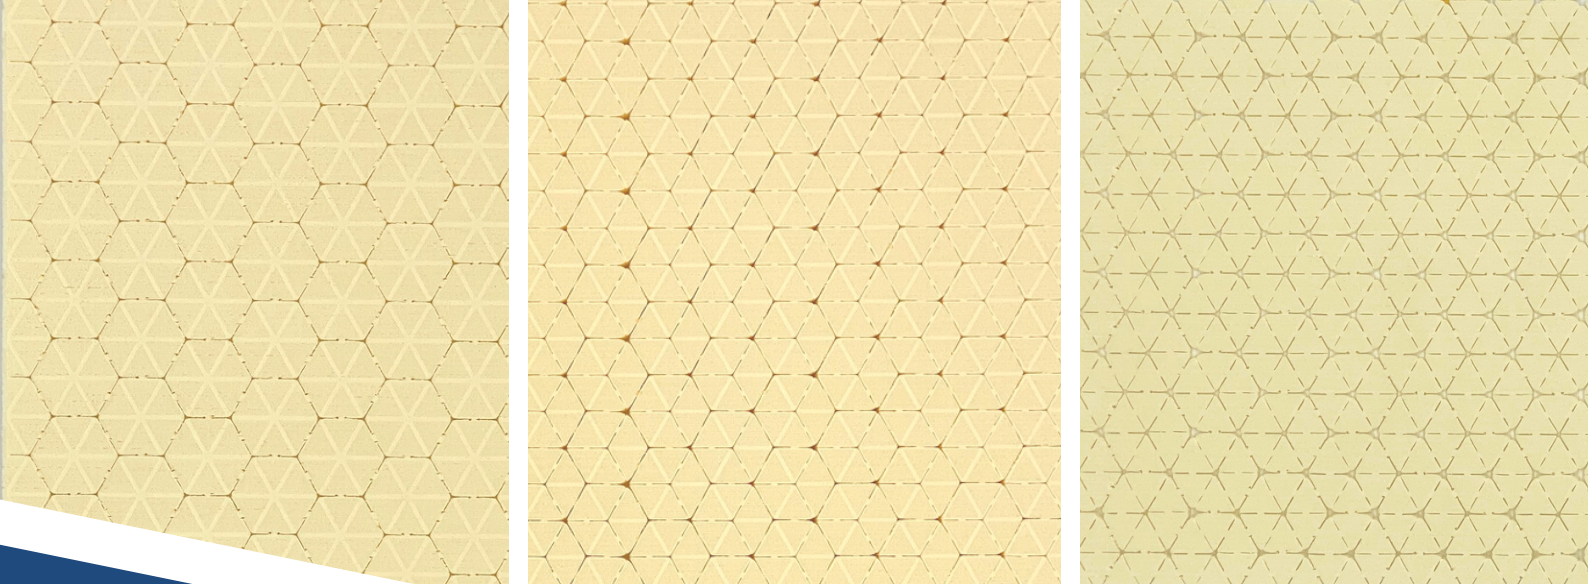

3D|CORE™ STRUCTURES

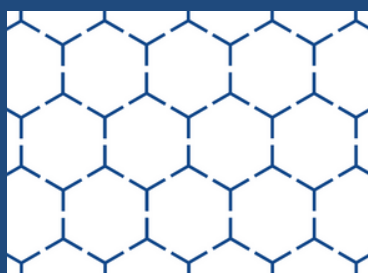


HEXAGON STRUCTURE

Improvement of the 3D|CORE™ HX structure compared to standard foam cores:

- Technical properties of the core by 100%, flexibility by 100% and more
- Peel strength of the fibre layers by 100%

Available in the XPS and PET foam.

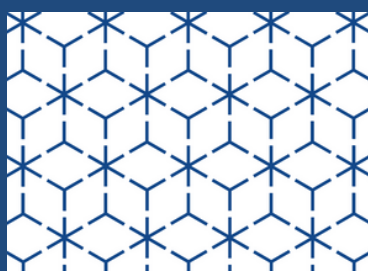

RHOMBUS STRUCTURE

Improvement of the 3D|CORE™ RB structure compared to standard foam cores:

- Technical properties approx. 200%, flexibility approx. 200% and more
- Peel strength of the fibre layers about 150%

Available in the XPS and PET foam.



DELTA STRUCTURE

Improvement of the 3D|CORE™ DT structure compared to standard foam cores:

- Flexibility by more than 300%
- Peel strength of the fibre layers about 200%

Available in the XPS and PET foam.

3D|CORE™

all around composites

ENGINEERING

PROCUREMENT

PRODUCTION

CERTIFICATION

DISTRIBUTED BY
FIBERLINK INC.

55 Valleywood Drive,
Markham, Ontario L3R 5L9
Canada

www.fiberglassfiberlink.com

Phone: 905-475-2300

Email: sales@fiberglassfiberlink.com

CONNECT WITH US:

